



## Quick Start Guide

**Pulse Monitoring System**  
with Wireless Mesh connectivity

**Model: E5B-M-P2**



This Quick Start Guide provides very high level installation instructions. Detailed installation instructions are available in the Product Guide at [eyedro.com/support](http://eyedro.com/support)

**This product is intended for indoor use only**

Eyedro Pulse Monitors are intended to interface with the following pulse meter output formats:

Form A (K<sub>V</sub>) dry contact pulses  
5V DC wetting value  
Rising or falling edge detection (default is rising edge)  
Minimum pulse width is 5ms  
Maximum frequency is 100Hz

**NOTE:** A higher wetting value (up to 24V) can be achieved by connecting a separate DC power supply (not provided) to input port C of the Eyedro Pulse Monitor module. The mating connector for port C is a 1.65mm (i.d) x 3.5mm (o.d) x 9mm (length) barrel plug with center pin positive.

## Online Support Resources

Visit [eyedro.com/support](http://eyedro.com/support) for online product setup wizard, user manuals, videos, and various support resources



[eyedro.com/support](http://eyedro.com/support)

## Limited One Year Warranty


Full warranty details are available in the Product Guide at [eyedro.com/support](http://eyedro.com/support).

**Important:** This product contains no user serviceable components. Do not attempt to open the case of the unit or tamper with the internal components. Doing so will void the product warranty.



Visit [eyedro.com](http://eyedro.com) for any questions or comments.  
We value your feedback.

## 1. Verify Package Contents

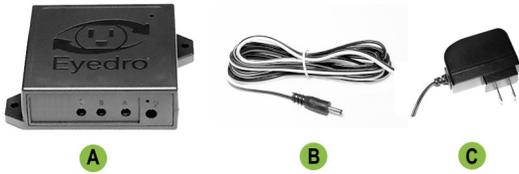

	Quantity	Description
<b>A</b>	1	Eyedro pulse module
<b>B</b>	2	Pulse interface cables
<b>C</b>	1	5VDC power adapter


## 2. Record Serial Number:

(located under barcode on module)

__	__	__	-	__	__	__	__
----	----	----	---	----	----	----	----

## 4. Create a MyEyedro User Account

4.1 Go to [my.eyedro.com](https://my.eyedro.com) to create your online account (or log in if you have an existing account).



4.2 Add the device to your user account: go to Configuration, select Devices then enter the serial number you recorded in Step 2.

4.3 ENJOY! Log into MyEyedro as often as you like to view your electricity consumption.

4.4 For more details about the MyEyedro cloud service, review the MyEyedro User Guide located at [eyedro.com/support](https://eyedro.com/support)

## 3. Install Hardware

3.1 Connect pulse interface cable to the output of the pulse meter.

- **Black** wire of the pulse cable to the **K** output
- **White** wire of the pulse cable to the **Y** output

3.2 Connect pulse cables and power adapter to the Eyedro module.

